

22-20 Ga. Fine Wire Upholstery Stapler

Compact and durable, the SFT10XP delivers best-in-class performance for a variety of fine wire stapling applications. Models drive staples ranging in length from 5/32" (4 mm) to 5/8" (16 mm). With a robust all-metal motor construction and ergonomic design, this tool works all day, every day and won't snag or scuff fabric.




Specifications

| | |
|--------------------------------------|---------------------------------|
| Item# | See below |
| Trigger Actuation | Sequential (optional automatic) |
| Reg. Operating Pressure | 60-95 psi (4.1 - 6.5 bar) |
| Air Consumption (60 cycles per min.) | .077 SCFM |
| Air Inlet | 1/4" NPT |
| Tool Weight | 2.1 lbs (0.955kg) |
| Height | 6.57" (167mm) |
| Length | 8.58" (218mm) |
| Width | 1.65" (42mm) |
| Fastener Capacity | 180 (D/L: 390) |


Fastener Specifications

| | |
|----------------|---------------------------------------|
| Gauge | 20-22 |
| Crown | 3/16" (A,D,E), 3/8" (C,G), 1/2" (B,F) |
| Fastener Range | 5/32" - 5/8" (4. mm-16mm) |
| Finish | Galvanized & Stainless |
| Collation | Glued straight strip |

22 Gauge

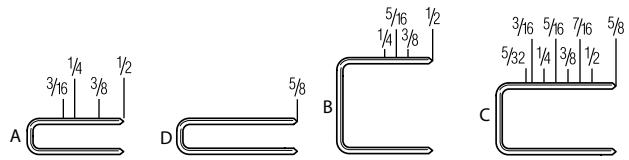

20 Gauge

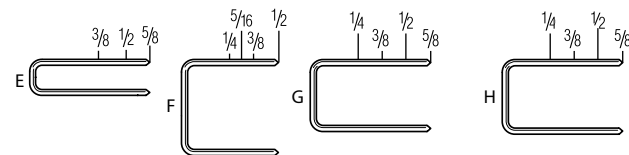

Applications

Upholstery, furniture assembly, cabinets, bedding, picture frames, molding, roof felt, house wrap, RV construction

Features and Benefits

- Heavy-duty steel cap – Superior balance with minimal recoil
- One-handed magazine opening – Increased productivity with less downtime
- Rear exhaust – Directs oil and dust away from the work surface
- Comfort grip – Reduces fatigue
- Short trigger stroke – Quick and precise operation
- Long lip length – Makes getting into tight spots easier
- Optional automatic fire – Adjustable firing rate from single shot to 30 fasteners/second
- Optional double length (D/L) magazines - Increased fastener capacity
- 5 year limited warranty
- Includes operator's manual and parts chart

SFT10XP Gauge: 22-20


| Item | Code | Description | Crown | Ga. | UPC |
|-----------------|---------|----------------------------------|-------|-----|--------------|
| A/D wire | 6S0001N | SFT10XP A/D-wire stapler | 3/16" | 22 | 741474123832 |
| | 6S0101N | SFT10XP A/D-wire auto stapler | 3/16" | 22 | 741474124419 |
| B wire | 6S0011N | SFT10XP B-wire stapler | 1/2" | 22 | 741474124433 |
| | 6S0211N | SFT10XP B-wire D/L stapler | 1/2" | 22 | 741474124471 |
| | 6S0311N | SFT10XP B-wire auto D/L stapler | 1/2" | 22 | 741474124495 |
| C wire | 6S0021N | SFT10XP C-wire stapler | 3/8" | 22 | 741474123856 |
| | 6S0121N | SFT10XP C-wire auto stapler | 3/8" | 22 | 741474124518 |
| | 6S0221N | SFT10XP C-wire D/L stapler | 3/8" | 22 | 741474124532 |
| | 6S0321N | SFT10XP C-wire auto D/L stapler | 3/8" | 22 | 741474124556 |
| | 6S0421N | SFT10XP C-wire long nose stapler | 3/8" | 22 | 741474124570 |
| E wire | 6S0031N | SFT10XP E-wire stapler | 3/16" | 20 | 741474124594 |
| F wire | 6S0041N | SFT10XP F-wire stapler | 1/2" | 20 | 741474124617 |
| | 6S0341N | SFT10XP F-wire auto D/L stapler | 1/2" | 20 | 741474124655 |
| G wire | 6S0051N | SFT10XP G-wire stapler | 3/8" | 20 | 741474124679 |
| | 6S0251N | SFT10XP G-wire D/L stapler | 3/8" | 20 | 741474124693 |
| | 6S0351N | SFT10XP G-wire auto D/L stapler | 3/8" | 20 | 741474124716 |
| H wire | 6S0361N | SFT10XP H-wire auto D/L stapler | 7/16" | 20 | 741474124730 |

SENCO[®]

Performance. Power.
Productivity.™

SFT10XP

Features

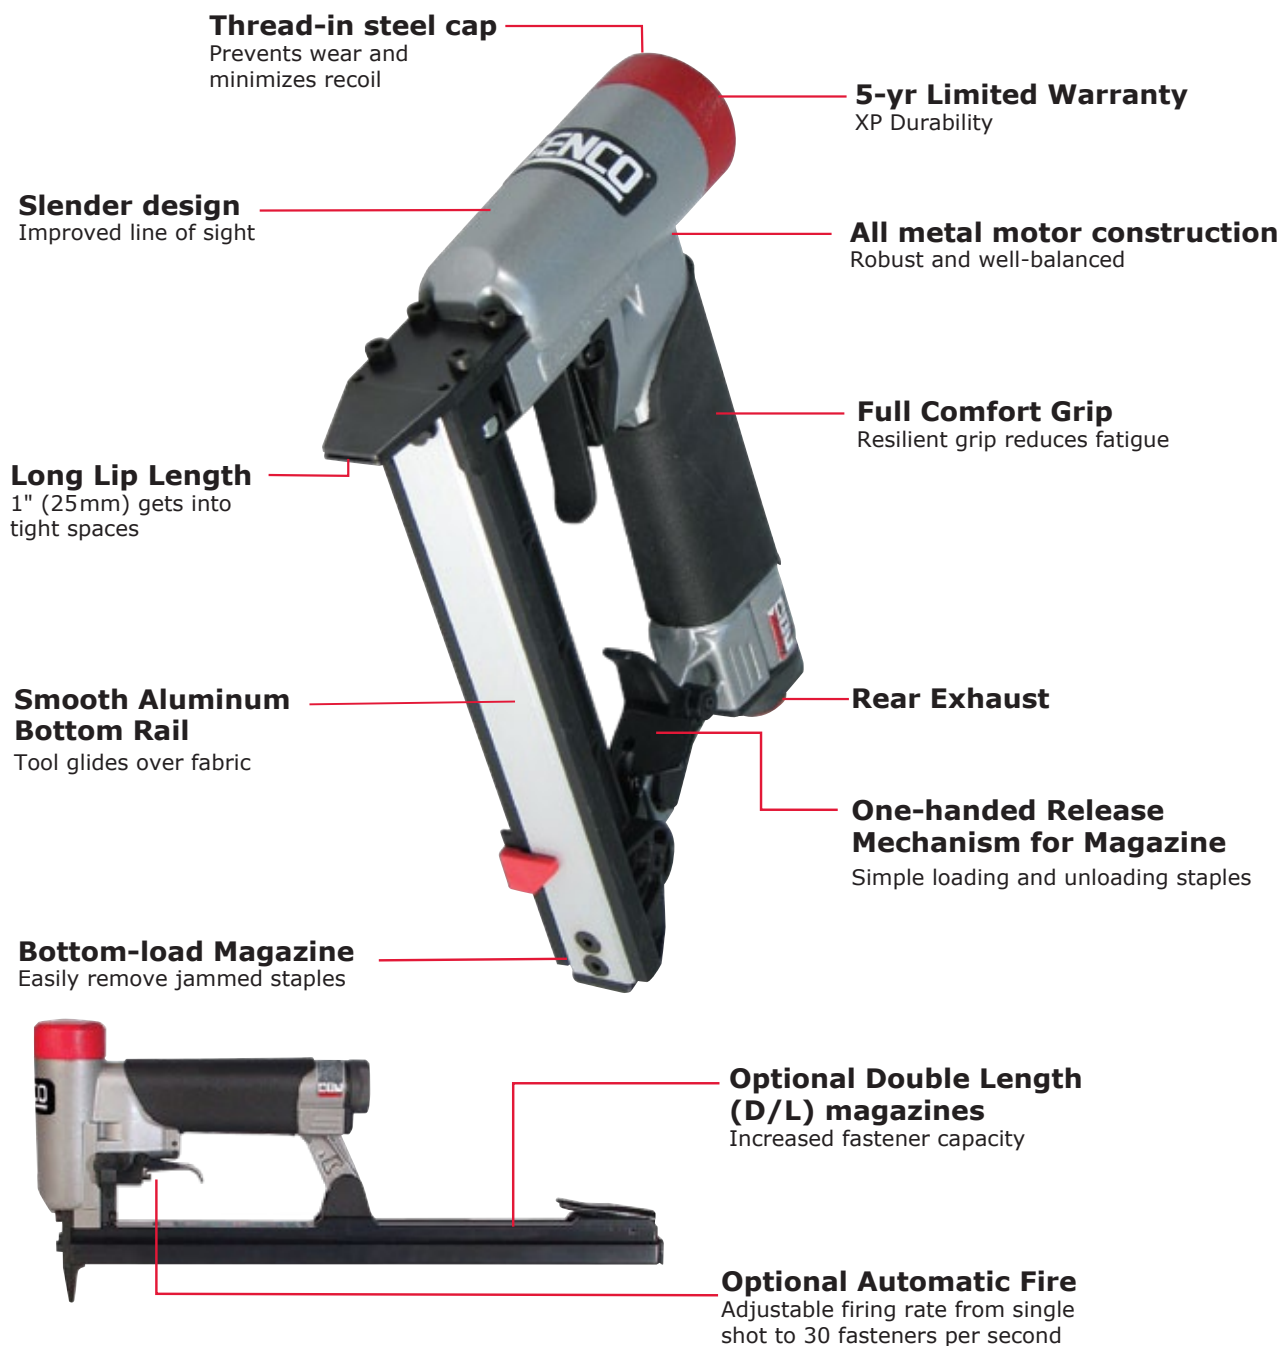

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on trigger systems and how Senco will save you time, reduce costs, and increase quality, call our toll-free Action Line: 800-543-4596 to find your nearest Authorized Senco Dealer, Distributor or visit our web site at: www.senco.com